



SD-14 OT

／
DOUBLE JERSEY INTERLOCK
OPEN WIDTH FRAME

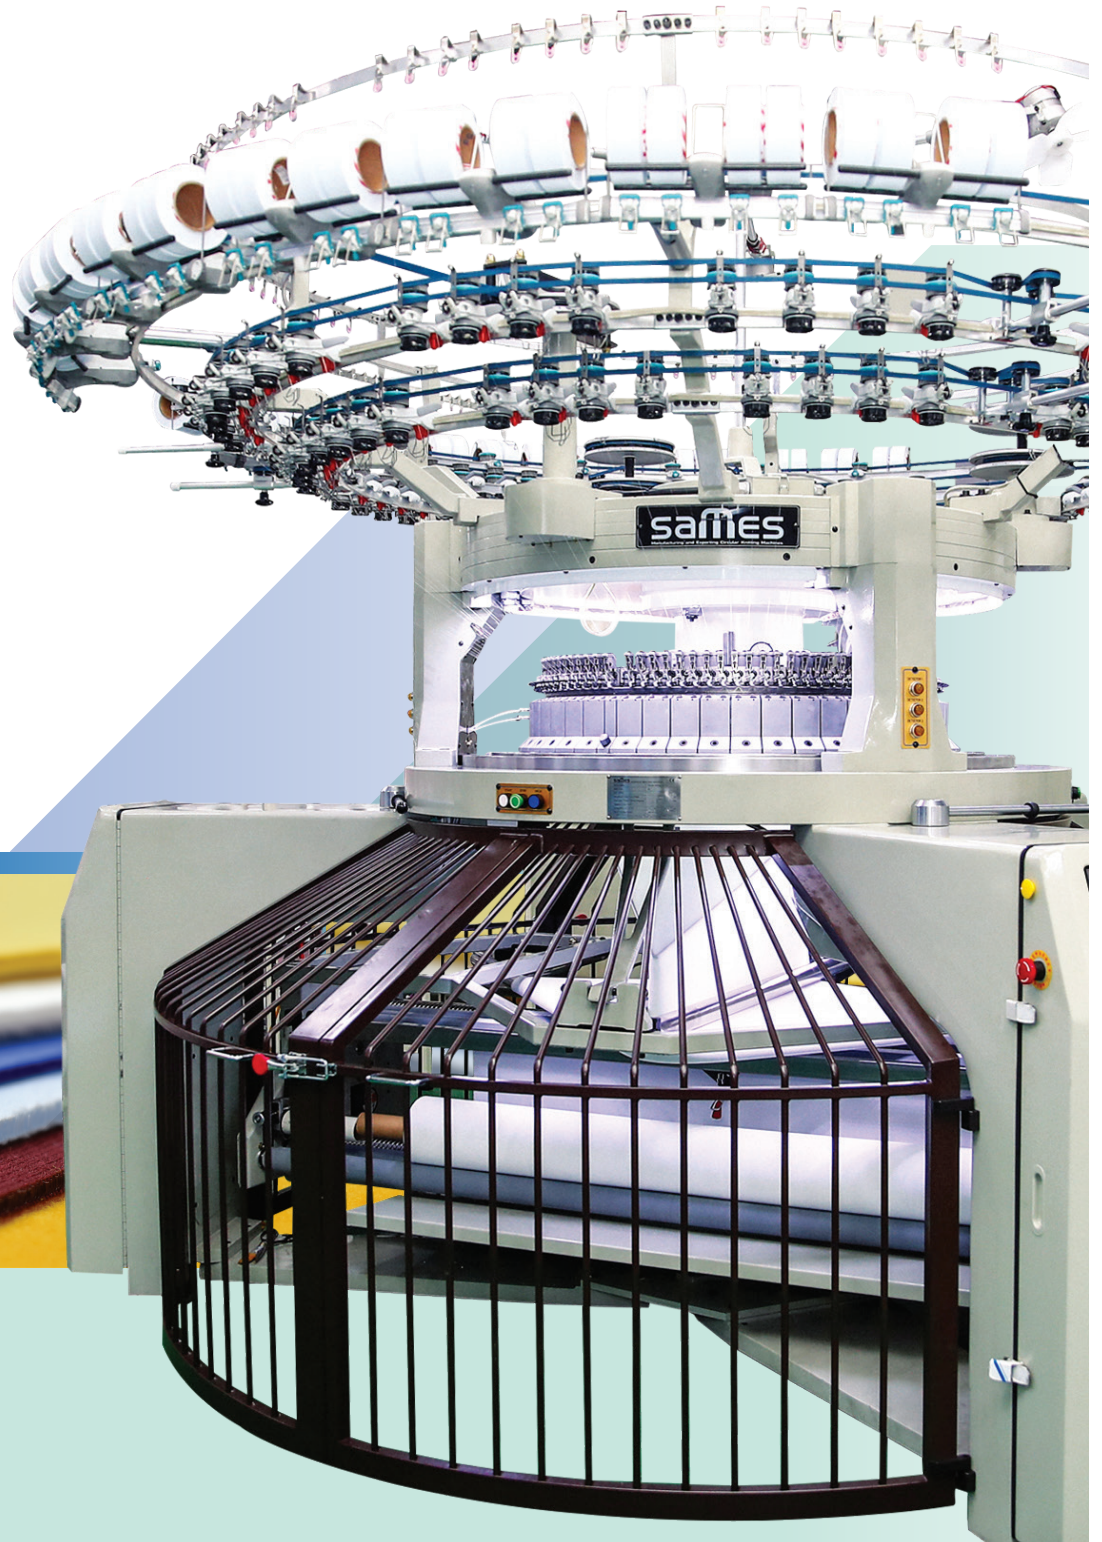

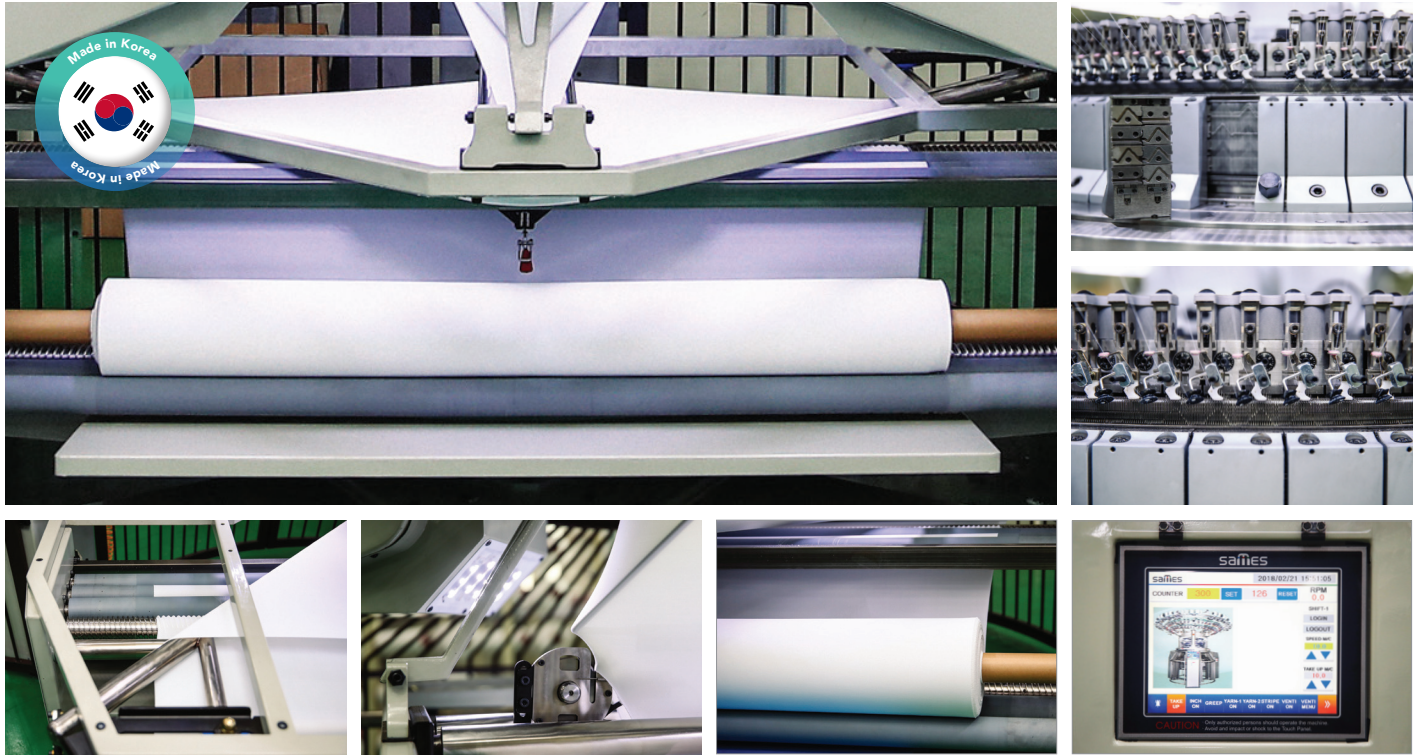

- Two cam rings can adjust the height of the cylinder cam box
This structure was only applied by SAMES Machinery, and it can knit various kinds of fabric materials
It has already been verified and is favorably received by customers
- The dual arrangement(upper,lower) of the ball race bearings completely block the cylinder clearance
- The three counter gears transmitted to the dial prevent the clearance between the cylinder and the dial
- The top gear and the main shaft do not use a key, therefore they use a separate device to maintain concentricity and planarity accurately
- Convenient for knitting various kinds of fabrics using dial 2track and cylinder 4track needles
- Fabric cutting using motor - Both ends of the fabric are cut smoothly because they do not receive tension
- Diameter of the fabric roll (general maximum diameter: 350 mm; optional maximum: 450 mm)
- neoprene, air cushion – No crease of fabric
- Yarn guide made by Zirconia
- 10 Inch touch panel Monitor



Technical Specification

MODEL	INCH	GAUGE	FEEDER
SD-14 OT	30~36	13.5~32	72~84
	30~36	18~42	84~96
	30~36	18~42	96~108
	30~36	20~32	108~126

Dimensions(Include side creel area)

(unit: mm)

Cylinder Diameter	A	B	C	D
28~32"	5,300	3,950	2,580	2,810
34~38"	5,500	3,950	2,700	2,940

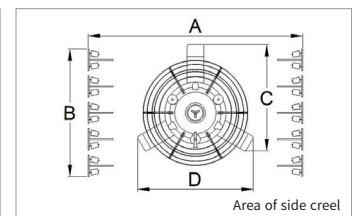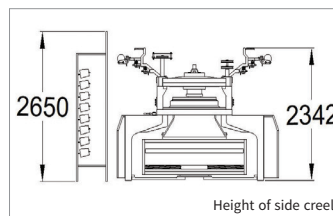

※ Based on 36" × 96F, 31" × 84F

Head Office

88, Jeonggeum-ro 393beon-gil, Gasan-myeon, Pocheon-si, Gyeonggi-do, Republic of Korea
Tel +82-31-543-8534 Fax +82-31-543-8539 E-mail samesmc@korea.com