


SS-3-4 OT SS-4-4 OT SS-5.6-4 OT

／
SINGLE JERSEY
OPEN WIDTH FRAME



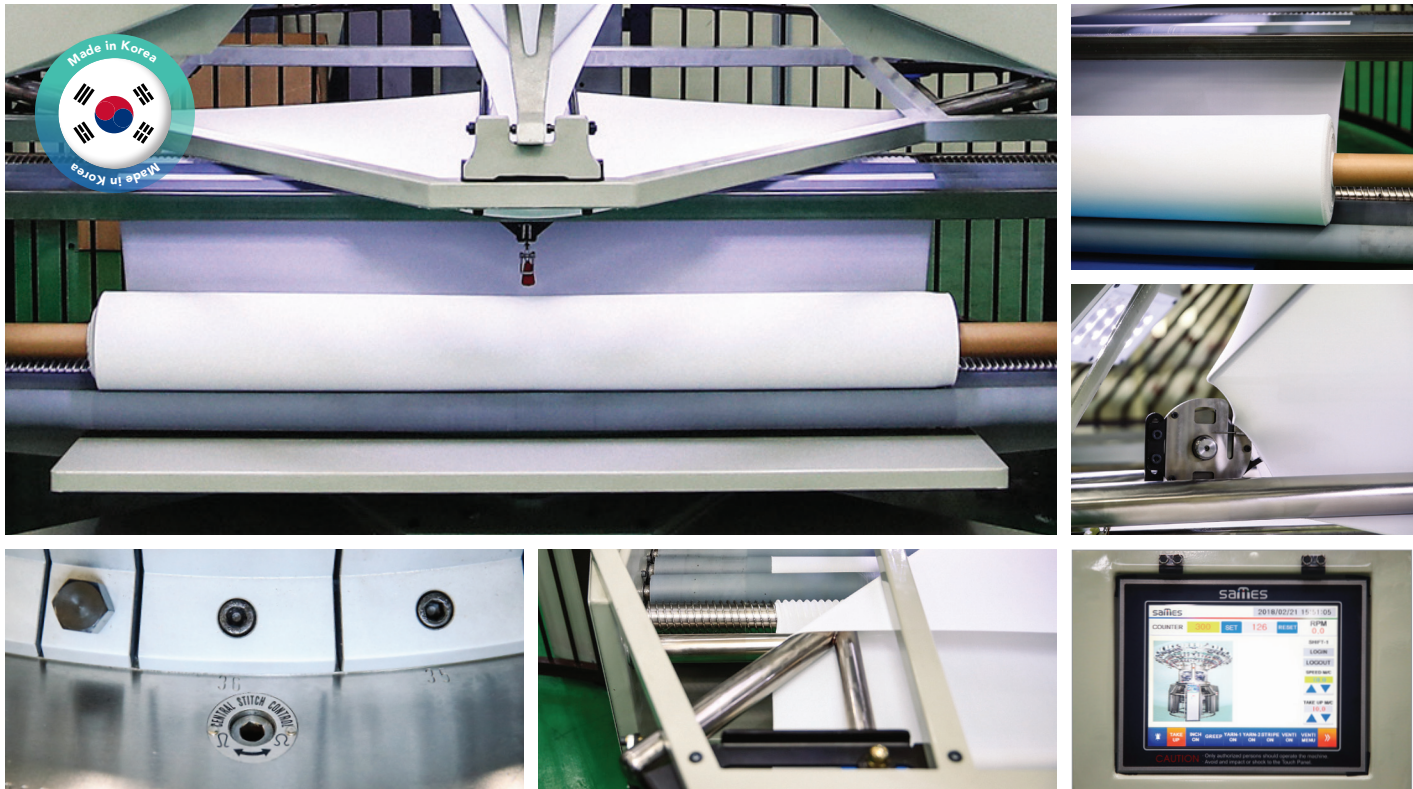

- Central Stitch Control System – Controls a speedy and uniform stitch length
- When adjusting the Sinker cap ring support the concentricity can be maintained and the convenience of use can be promoted with a flexible movement using two-ball bearings that are mounted on six legs
- The stable structure of the machine is suitable for high-speed rotation and low maintenance cost
- Fabric cutting using motor - Both ends of the fabric are cut smoothly because they do not receive tension
Diameter of fabric roll (general maximum diameter: 350 mm; optional maximum: 450 mm)
- Provides a bright and convenient work environment through LED lighting
- Yarn guide made by Zirconia
- 10 Inch touch panel Monitor

Technical Specification

MODEL	INCH	GAUGE	FEEDER
SS-3-4 OT	30~40	18~42	90~120
SS-4-4 OT	30~40	18~32	120~160
SS-5.6-4 OT	30~40	18~32	170~244

Dimensions(Include side creel area)

(unit: mm)

Cylinder Diameter	3F / Inch		4F / Inch		C	D
	A	B	A	B		
32"	5,600	4,570	6,200	5,910	2,650	2,880
36"	5,700	4,570	6,500	6,580	2,730	2,980

Height of side creel

Area of side creel

Head Office

88, Jeonggeum-ro 393beon-gil, Gasan-myeon, Pocheon-si, Gyeonggi-do, Republic of Korea
Tel +82-31-543-8534 Fax +82-31-543-8539 E-mail samesmc@korea.com